
ALKAR PURE LinkTM

Automated Processing for Linked Products 2,000 to 10,000 lbs/hr



- Reduced Labor (10 Less Operators Required)
- Reduced Re-Work (No Touchers or Cobra Heads)
- Increased Yields (2% to 10%)
- Increased Energy Efficiency (Up to 10% Less)
- Automated Loading and Unloading
 - No Lifting of Product
 - No Product Trucks or Sticks
- Integrated Controls
 - Packaging and Thermal Processing

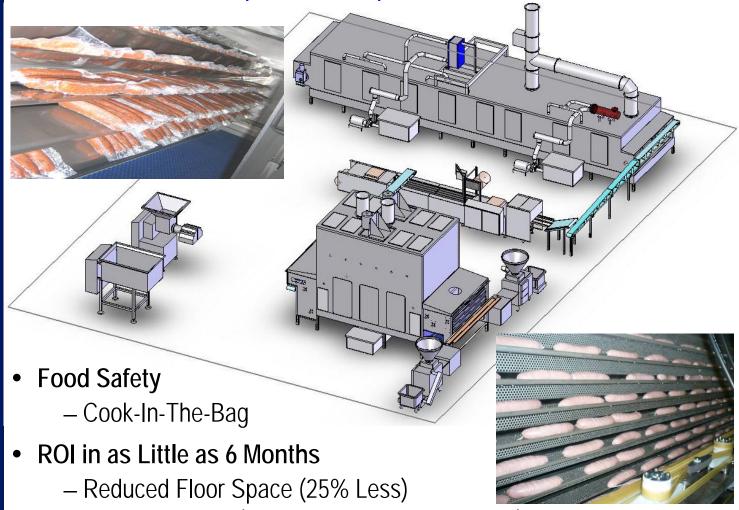

ALKAR PURE LinkTM

- Casing Selections
 - Natural 15 mm to 50 mm
 - Co-Extruded Collagen
 - Collagen
 - Alginate
 - Plastic
- Gas, Steam, or Hot Oil Heat Post-Package Cook & Chill

