



AllroundSystem

The space-saving solution for roasting and baking

Advantages

Consistent product results:

Horizontal air circulation, suction and the adaptation of the air quantity to products guarantee constant and reproducible production results.

High loading capacity:

Thanks to the horizontal air circulation, all products, such as baked sausage meat in various moulds, with minimum vertical clearances (min. 5cm above the product) can be loaded onto the oven trolley. The systems therefore offer a maximum loading and product capacity.

Efficiency:

The system's energy supply is selected so that the set values can be rapidly achieved. The cabinet insulation maintains the operating temperature over a long period. Short process times thanks to exceptionally high quantities of circulating air lead to a lower weight loss and therefore to a higher production capacity.

Characteristics

Use:

Universal high-temperature system with horizontal air circulation

Possible processes:

- cooking, hot air finishing, browning
- roasting and baking


Air systems:

- Individual fans for each trolley place

Hygiene:

- Automatic interior cleaning

AllroundSystem: The space-saving solution for roasting and baking

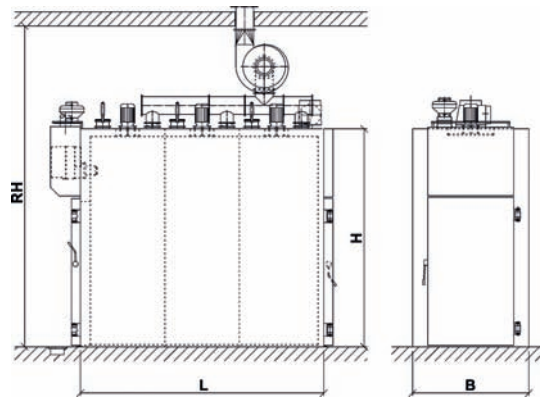

	ARO type	Number of trolleys	Door opening clearance (cm)		Cabinet dimensions (incl. extension) (cm)			Min. room height (cm)	Electric	Heating Electric; Gas	Humidification, Cooking Steam	Weight
			width	height	height [H]	width [B]	length [L] [⊖]					
Tandem	3711	1	111	202	289	160	130	390	5,7	60/90	50	1000
	3721	2	115	202	309	164	237	410	10,8	120/180	80	1400
	3731	3	115	202	317	164	343	410	14,6	180/270	115	1900
	3741	4	115	202	309	164	447	410	18,4	240/n. a.	150	2400
also to be considered			wedge (2x for tunnel)				plus 7					
			with tunnel				plus 6					

n. a.: not available

⊖ without tunnel

⊖ approximately connected loads

Features	Description	Standard	Options	Further flyers
Operation	external operating controls	x		Control and documentation systems
Standard heating (optional)	electric (250 °C)	x	up to 300°C in special cases	
	gas (250 °C)	up to 3731	up to 300°C in special cases	
Smoke	external smoke generator		x	External smoke generators
	RONDAIR closed reduction system		x	
	afterburning system		x	Environment and energy efficiency systems
Cleaning	interior cleaning		x	
	RG-A2.5 or RG-A8		x	Cleaning systems
Horizontal air flow	horizontal air circulation system	x		
	without slope	x		
Floor	slope in the system		x	
	floor reinforced with 10 mm plate		x	
	recessed floor (H = 50 mm)		x	
	anti-slide profile		x	
Doors	lifting door hinge, lifting 15mm	x		
Tunnel	additional doors on the unloading side		from 3721	
	interlocking		x	
Drainage	automatic door opening		x	
	pneumatic post outlet		x	