



ProfitLine

The industrial solution for cooking

Advantages

Low investment costs:

The systems are specially developed for the cooking process in order to guarantee low investment costs for a high production capacity.

High product quality:

A consistent and reproducible product quality with low process costs is achieved thanks to the technically sophisticated direct steam injection system in the cabinet.

Designed for industry:

Wide door opening clearance

Characteristics


Use:

The universal system for cooking and pasteurizing.

Possible processes:

- cooking
- pasteurizing
- showering

ProfitLine: The industrial solution for cooking

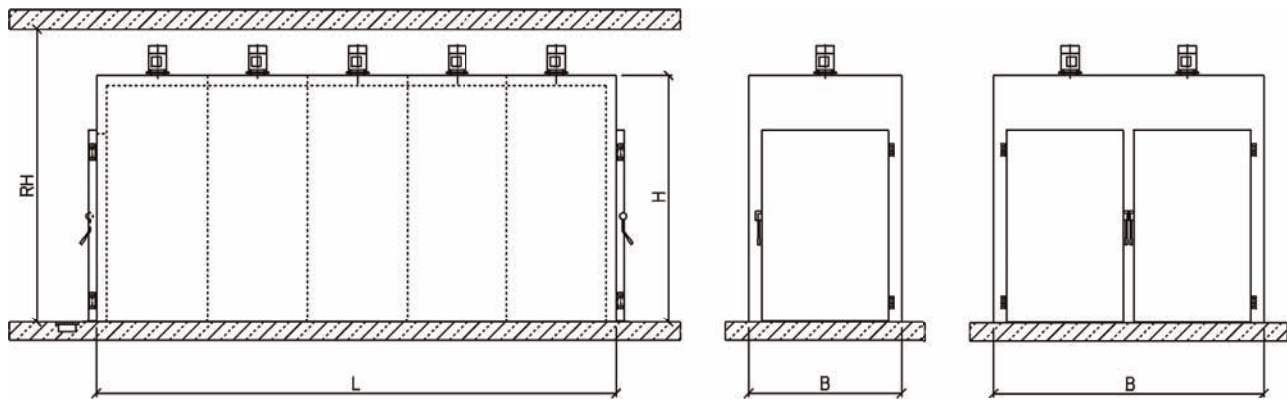

	PK type	Number of trolleys	Door opening clearance (cm)		Cabinet dimensions (incl. extension) (cm)			Minimum room height (cm)	Electric with air circulation motor	Low pressure Steam	Water Shower	Weight	
			width	height	height [H]	width [B]	length [L] [⊙]						
Tandem	1043	4	120	210	275	170	473	350	12,2	184	50	2440	
	1053	5	120	210	275	170	584	350	16,2	230	65	2900	
	1063	6	120	210	275	170	695	350	18,9	276	75	3360	
	1073	7	120	210	275	170	806	350	21,6	322	85	3820	
	1083	8	120	210	275	170	917	350	24,3	368	100	4280	
Parallel	2063	6	(2x) 120	210	275	300	362	350	18,9	276	75	2840	
	2083	8	(2x) 120	210	275	300	473	350	24,3	368	100	3520	
	2103	10	(2x) 120	210	275	300	584	350	29,7	460	125	4200	
	2123	12	(2x) 120	210	275	300	695	350	37,8	552	150	4880	
also to be considered			wedge (2x for tunnel)				plus 15						
			without tunnel				minus 8.5						
			overhead rail		on request								
			lifting doors		on request				min. 500				

⊙ with tunnel

⊙ approximately connected loads

Features	Description	Standard	Options	Further flyers
Operation	external operating controls	x		Control and documentation systems
Standard heating	low pressure (80 °C)	x		
Cleaning	interior cleaning / sterilization		x	
	RG-A2.5 or RG-A8		x	Cleaning systems
Cooking	interior 1.4571 / AISI316	x		
Air circulation	air circulation unit	x	x	
Cooling	showering		x	
	iced water		x	
Floor	double-walled, without slope	x		
	anti-slide profile		x	
Doors	lifting door hinge, lifting 15mm	x		
Tunnel	additional doors on the unloading side		x	
	interlocking		x	
Lifting doors	instead of swing doors		x	
Drainage	pneumatic post outlet	x		
Transport systems	floor transport (automatic)		x	Semi-continuous unit systems
	overhead rail (automatic)		x	Semi-continuous unit systems
	overhead rail with max. 1t/cart place (man.)		x	