



THURNE

Polyslicer 3000



Key Performance

- High output up to 1500 slices / min / lane
- High on weights, low giveaway
- Consistent accuracy
- Excellent product presentation with minimal manual intervention


High performance slicing for processed and cooked meats and cheese

- Choice of orbital or involute blade with serration and coatings to enable optimum slicing for every application
- Continuous or gripper feed options
- Optional advanced cut face vision system for enhanced weight control for natural products and void detection
- Optional automatic completion of part packs at slicer reload transition
- Easily removed product contact parts for fast and thorough cleaning
- Standard automatic log loader ensures minimal reload time
- Hygienic construction suitable for ready to eat applications
- Can be integrated into slicing lines





Pack presentations:

Optional vision system:

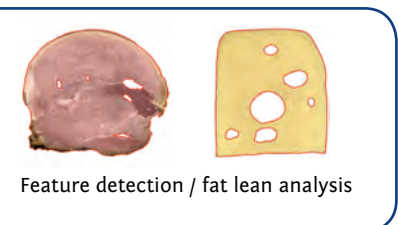

Technical Information	
Feed	Gripper feed with automatic log loader or Continuous feed
Blade	Orbital or Involute
Max. speed	up to 600 rpm (orbital) up to 1500 rpm (involute)
Slice thickness	0.3 to 20 mm
Max. cutting area (WxH)	380 x 240 mm 15" x 9 1/2" approx.
Max. product length (Gripper feed model)	1150 mm 47 1/4" approx.

Services	
Electrical	380V to 480V ± 10% 50/60Hz 3 Phase + Earth (No Neutral)
Air Supply inc. Vision	max. 420 Normalised litres/min @ 5 bar min.
Weight	1605 kg (3538 lbs)

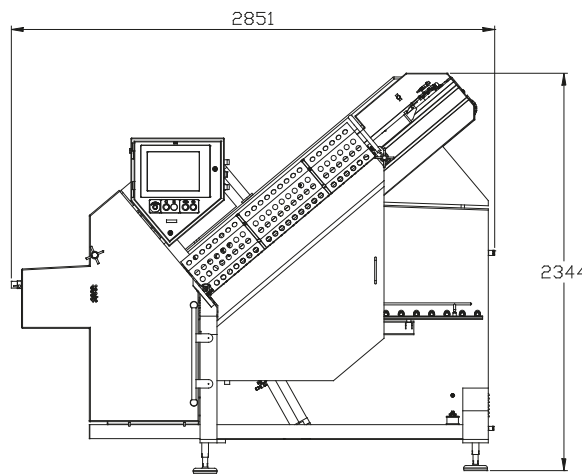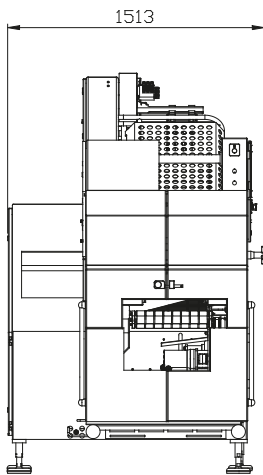

CONTACT

Thurne-Middleby Ltd
 Gresham House • Pinetrees Business Park • Salhouse Road • Norwich NR7 9BB • UK
 Tel. +44 (0)1603 700755 • Fax. +44 (0)1603 700844

Thurne USA
 4300 West Bryn Mawr Avenue • Chicago, IL 60646-5943 • U.S.A.
 Tel: +1 773 478-9700 Fax: +1 773 478-8689

info@thurne.com
 www.thurne.com